

Note:

- During the attendance check a sticker containing a unique code will be put on this exam.
- This code contains a unique number that associates this exam with your registration number.
- This number is printed both next to the code and to the signature field in the attendance check list.

Computer Networking and IT Security

Exam: INHN0012 / Midterm

Date: Friday 16th December, 2022

Examiner: Prof. Dr.-Ing. Stephan Günther

Time: 13:30 – 14:15

Before we proceed with reading the processing instructions, please answer the following questions. This information helps us to examine learning success depending on participation in individual lecture components. The information is **voluntary** and **not considered for evaluation**, i. e., answers to these questions do not give credits. In order to exclude any influence, this page will not be made accessible during the correction.

a) Did you attend the lecture?

1 (regularly)

2 (sometimes)

3 (never)

b) Did you attend the tutorials?

1 (regularly)

2 (sometimes)

3 (never)

Working instructions

- This exam consists of **8 pages** with a total of **3 problems** and a cheatsheet. Please make sure now that you received a complete copy of the exam.
- The total amount of achievable credits in this exam is 45 credits.
- Detaching pages from the exam is prohibited.
- Allowed resources:
 - one **non-programmable pocket calculator**
 - one **analog dictionary** English ↔ native language
- Subproblems marked by * can be solved without results of previous subproblems.
- **Answers are only accepted if the solution approach is documented.** Give a reason for each answer unless explicitly stated otherwise in the respective subproblem.
- Do not write with red or green colors nor use pencils.
- Physically turn off all electronic devices, put them into your bag and close the bag.

Left room from _____ to _____ / Early submission at _____

Problem 1 Multiple Choice (9 credits)

The following subproblems are multiple choice / multiple answer, i. e., at least one answer per subproblem is correct. Subproblems with a single correct answer are graded with 1 credit if correct. Those with more than one correct answers are graded with 0.5 credit per correct answer and -0.5 credit per wrong answer. Missing crosses have no influence. The minimal amount of credits per subproblem is 0 credits.

Mark correct answers with a cross



To undo a cross, completely fill out the answer option



To re-mark an option, use a human-readable marking



a) Given the signals shown in Figures 1.1 (a)–(d) below. Which signal properties hold?


(a) time discrete (b) time discrete (c) time discrete (d) time discrete.

(a) time cont. (b) time cont. (c) time cont. (d) time cont.


b)* Given the signals shown in Figures 1.1 (a)–(d) below. Which signal properties hold?

(a) value discrete (b) value discrete (c) value discrete (d) value discrete


(a) value cont. (b) value cont. (c) value cont. (d) value cont.

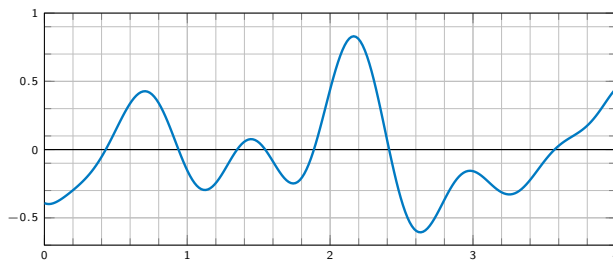


(a)

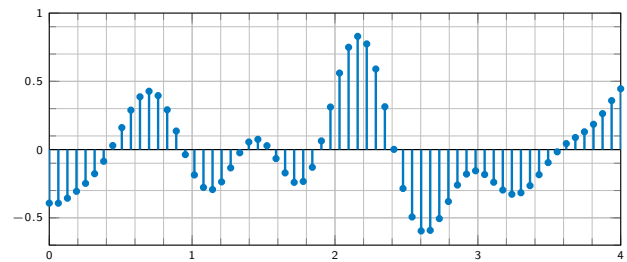

(b)

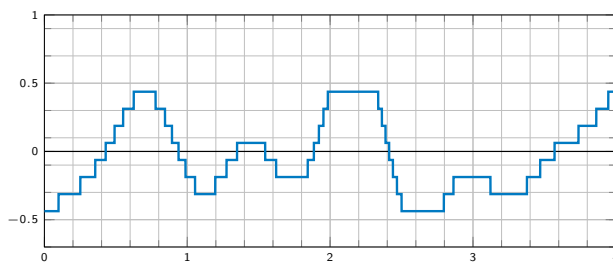

(c)

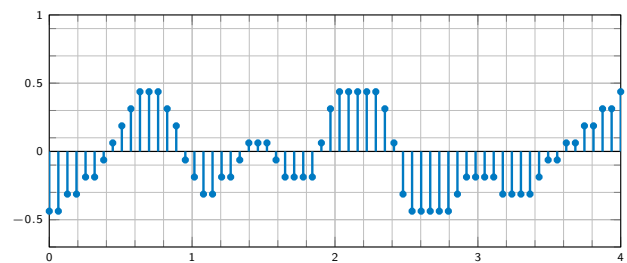


(d)

Figure 1.1: Signals

c)* The constellation diagram adjacent shows which digital modulation scheme?

8-ASK 8-PSK 8-QAM

8-PAM 8-RSK 8-CSK





d)* If the notebook (NB) in the adjacent figure wants to send a frame to one of the PCs, whose MAC address(es) are used to specify the destination?

PC AP Switch NB

e)* If the notebook (NB) in the adjacent figure wants to send a frame to one of the PCs, whose IP address(es) are used to specify the destination?

PC NB Switch AP

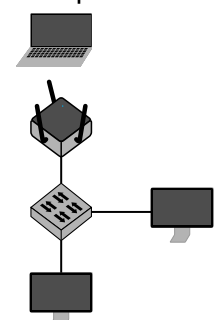





d)* How do split horizon, triggered updates, and path vector work, and how do they try to solve *count to infinity* occurring with distance vector protocols?



e)* Why is there a limit to the physical extent of an Ethernet connection? Assume that a minimum frame size is always enforced.



f)* Given the following topology with assigned link costs, cross out all links that would **not** be in use after a link-state routing protocol has fully converged. **Hint:** Choose and mark a specific root node!

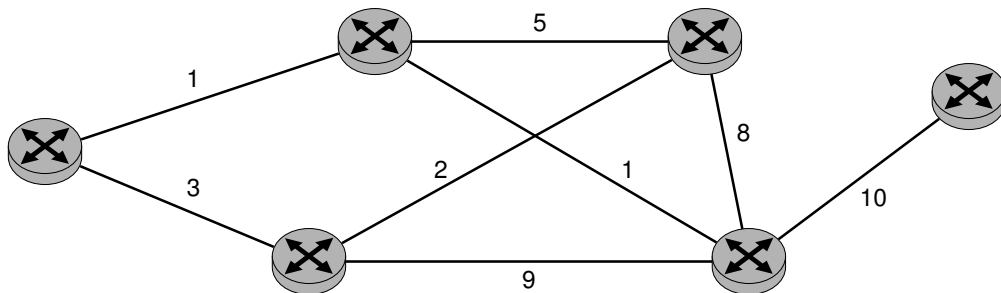


g)* Convert 0xadfe1723 from big endian to network byte order.




h)* Why does the IPv6 header not require a header length field?


i)* IEEE 802.11 data frames typically contain three layer 2 addresses. Depending on the direction of the frame, these three addresses have four different meanings. Briefly describe those four different meanings.




j)* An interface has been assigned the address 10.42.28.6/20. What is the IPv4 network and broadcast address for the network?



k)* Show whether the networks of the addresses 192.168.12.1/24 and 192.168.12.2/24 can be combined into a /23 network.



l)* Generate the IPv6 link-local address for the interface with layer 2 address 04:7b:cb:b9:17:ac. Give the address in its shortened form.



Problem 3 Packet Pair Probing (14 credits)

Let us assume the simplified network topology from Figure 3.1. Nodes 1 and 4 are connected to their routers via a full-duplex local network. All links are assumed to be full duplex and symmetric. The two distances d_{12} and d_{34} are negligibly small. The connection between routers 2 and 3 is significantly slower. It therefore holds that $r_{23} < r_{12}$ and $r_{23} < r_{34}$. The distance d_{23} is **not** to be neglected.

The transmission rate r_{23} is to be determined by Node 1 by generating as little load as possible on the already slow link. The method should work with all nodes that have a common IP stack.


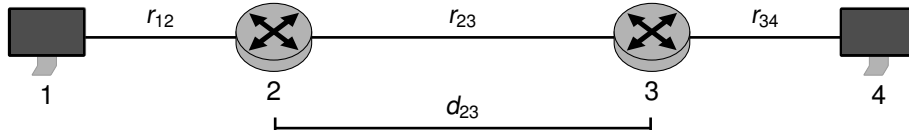


Figure 3.1: Simplified network topology


In this problem, we first derive a general method for node 1 to determine the transmission rate in question. Then we evaluate the method for concrete numerical values.



a)* How will node 4 react when it receives the ICMP echo requests from node 1?




b)* Complete the path-time diagram shown in the solution box.

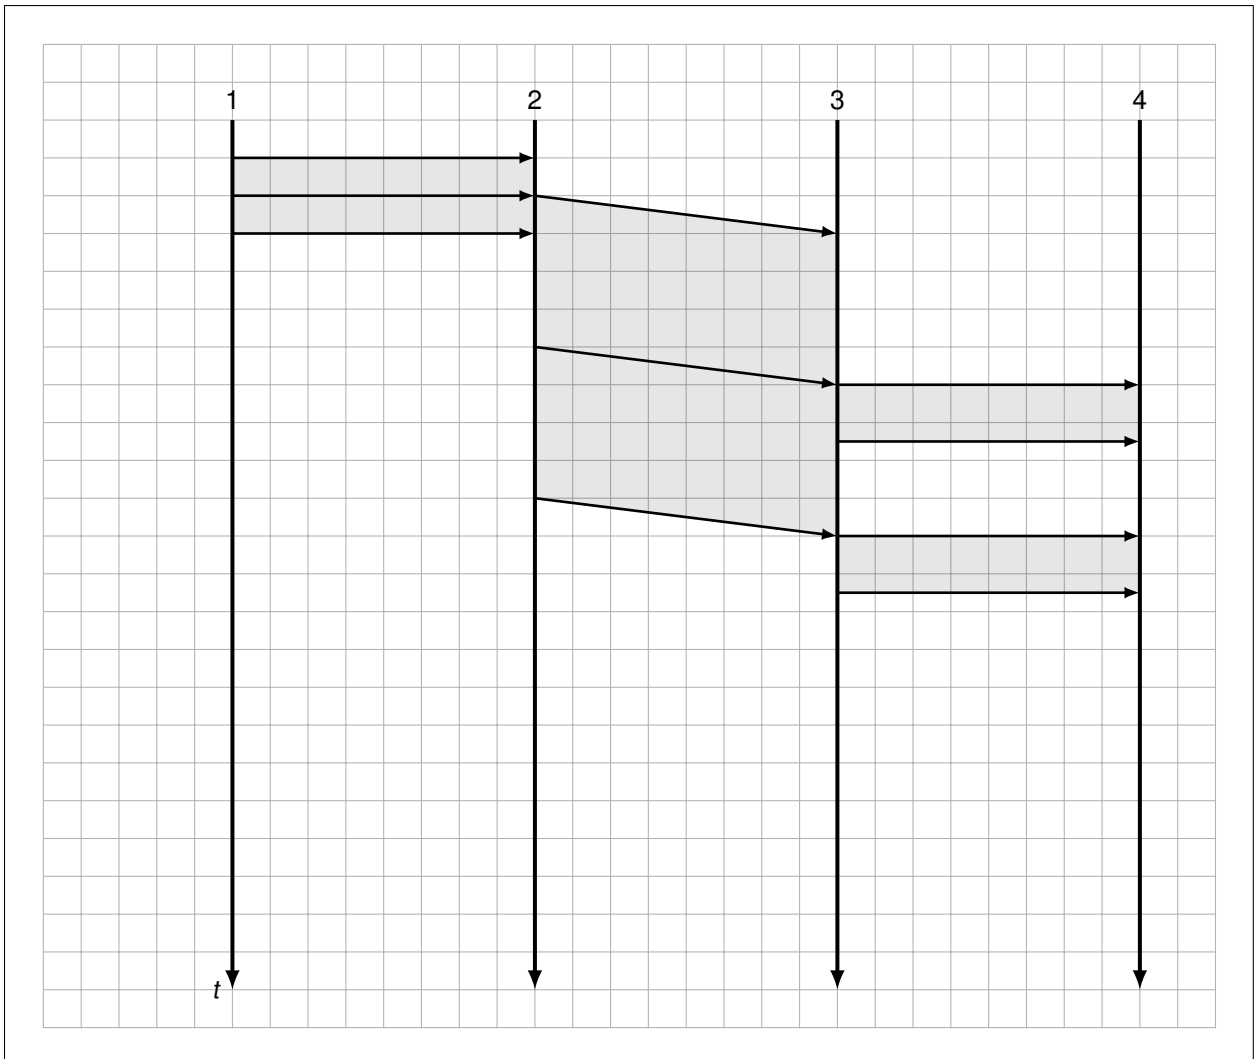


Due to the low transmission rate between nodes 2 and 3, a reception pause Δt occurs at node 1. This can be measured by node 1 and used to determine the "transmission rate between nodes 2 and 3.


c) Mark Δt in your solution of Subproblem b).




d) Describe in words the general influence of d_{23} on the reception pause Δt .




e) Describe in words the general influence of r_{34} on the reception pause Δt .




f) What condition must r_{34} thus satisfy exactly such that the procedure works?



g) Derive an expression for Δt . Simplify it as much as possible.




h) Derive an expression for the data rate r_{23} we are looking for. Simplify it as much as possible.



Repeated measurements of node 1 result in an average value $\overline{\Delta t} = 108 \mu\text{s}$ with a packet size of $p = 1500 \text{ B}$. The transmission rate r_{12} is 1 Gbit/s.

i) Determine r_{23} in that case.



Additional space for solutions—clearly mark the (sub)problem your answers are related to and strike out invalid solutions.

