

Computer Networking and IT Security (INHN0012)

Tutorial 12

Problem 1 All in a nutshell

In this task, let us trace everything that happens when you access the `www.google.de` web page on your computer. We assume that ARP and DNS caches are still empty in your private network, but any caches from the first router onward can be assumed populated. The network topology is shown in Figure 1.1. Your router translates private IP addresses to public IP addresses as well as port numbers using NAT. On your computer, the Google resolver is configured with the IPv4 address `8.8.8.8`, which allows recursive queries.

Now for **each link**, i. e., each section between two devices (e. g. from PC to SW), some selected fields of the message headers which are sent via this link in the respective step are to be noted. Since this is a bit of writing, especially for MAC addresses, we abbreviate addresses using `<device name>.<interface>.<type>`, e. g. let `RA.eth0.MAC` stand for the MAC address of interface `eth0` to router `RA`.

You find pre-printed tables in Figures 1.2 — 1.5.

Each line corresponds to a message transmitted via the respective link. The first column therefore denotes the link, e. g. from the PC to the switch or from the switch to the router. The other columns represent the different layers of the ISO/OSI model. These are each divided into the relevant header fields of the commonly used protocols. Depending on the message, not all columns may be applicable. **Cross out unused fields.** An example is already entered in the table.

Some headers have a protocol field that specifies the protocol of the next higher layer. Usually, numerical codes stand for the respective protocols. It is **not** necessary to specify these numerical codes. Instead, it is sufficient to specify the protocol used, e. g. IPv4, TCP or UDP.

There are certain freedoms for some header fields, e. g. for port numbers or the initial TTL. In these cases, choose **meaningful** values.

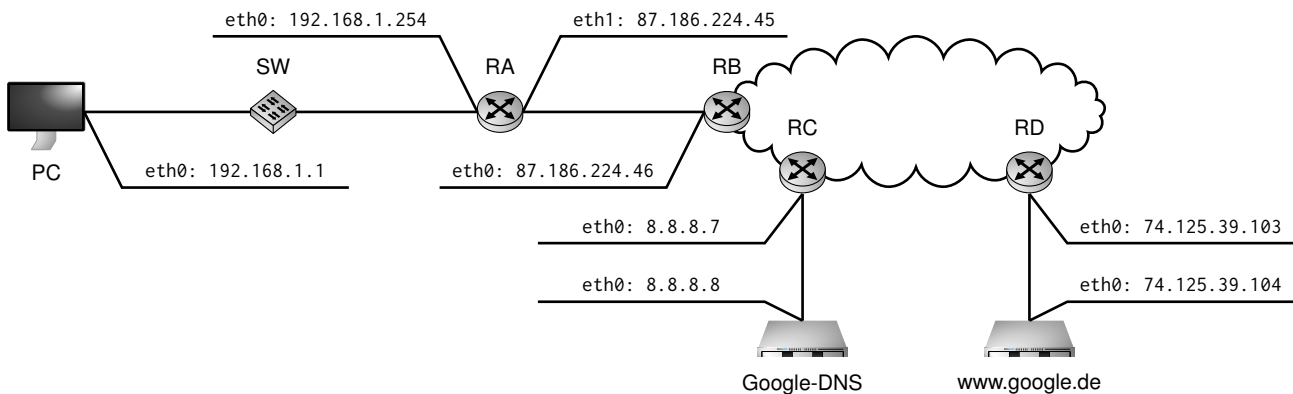


Figure 1.1: Network topology for Problem 1. The relevant links are marked with the numbers 1 – 5.


a)* Now fill in the forms in Figures 1.2 – 1.5. Stop after **the first** message transmitted over the link from PC to SW that is directed to `www.google.de`.

Notes:

- We assume that there are a total of 10 other routers between router RB and RC. This is decisive to determine the TTL.
- Enter the application layer protocol by name in the respective column. If applicable, denote the type of the message (e. g. request or response) as well as the content of the message in descriptive form (e. g. “DNS request” or “DNS response”).


The previous subproblem has presented in detail the processes up to the beginning of the TCP connection construction. In the following, we focus on the TCP connection and data transmission. To this end, we now only consider the logical connection between the PC and `www.google.de` in the form of a simple path-time diagram **without** any nodes on between. Serialization time and propagation delay may be neglected. Also assume that no segment losses occur during the entire transmission.

b)* Sketch a path-time diagram representing the TCP connection setup. Specify the sequence number, acknowledgement number, flags set, and the payload length l for each segment.

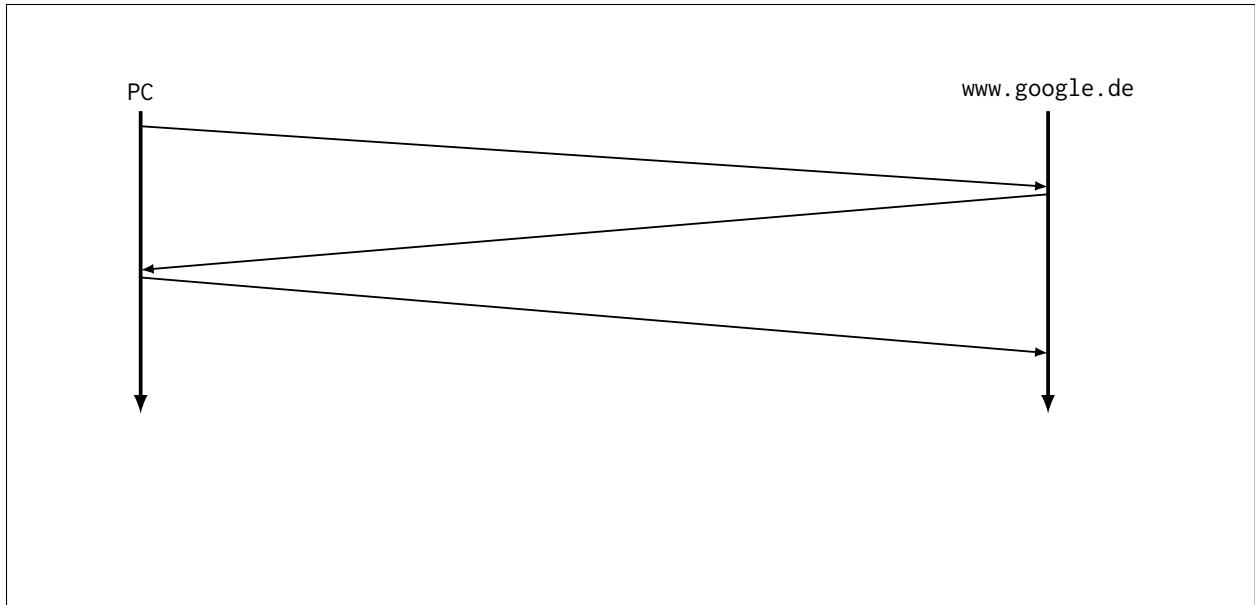


The PC now requests the website stored hosted at `www.google.de`. For this purpose, the PC sends a HTTP GET message, which has a useful data length of $l_1 = 50$ B from the perspective of layer 4. The web server will then send the web page to the PC, which is assumed to be of length $l_2 = 1000$ B. Let the negotiated MSS¹ be larger than l_2 .

c) Sketch a path-time-diagram which shows the TCP connection phase. Assume the sequence numbers negotiated in Subproblem b). Specify the sequence number, acknowledgement number, flags set, and the payload length l for each segment.

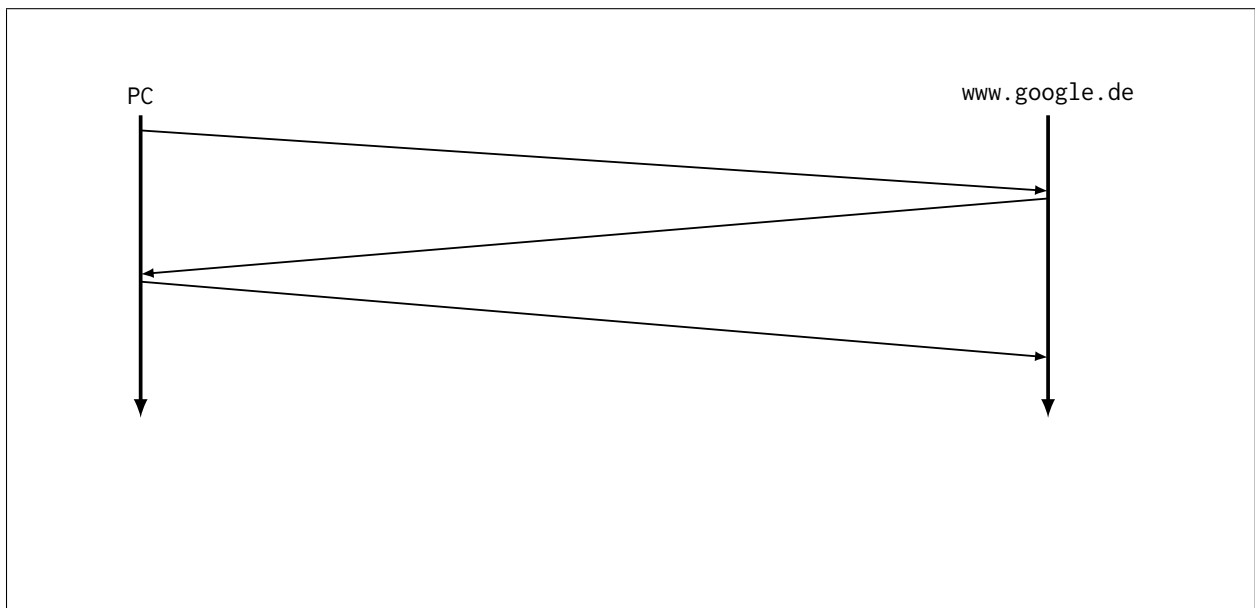

¹The MSS (Maximum Segment Size) specifies the maximum size of a segment. It refers only to the payload from the perspective of layer 4. Plain acknowledgements, for example, are zero-length segments that consist only of a TCP header.

d) Sketch a path-time diagram representing TCP connection termination. Assume the PC initiates the teardown. Assume the sequence numbers negotiated in Subproblem b). Specify the sequence number, acknowledgement number, flags set, and the payload length l for each segment.

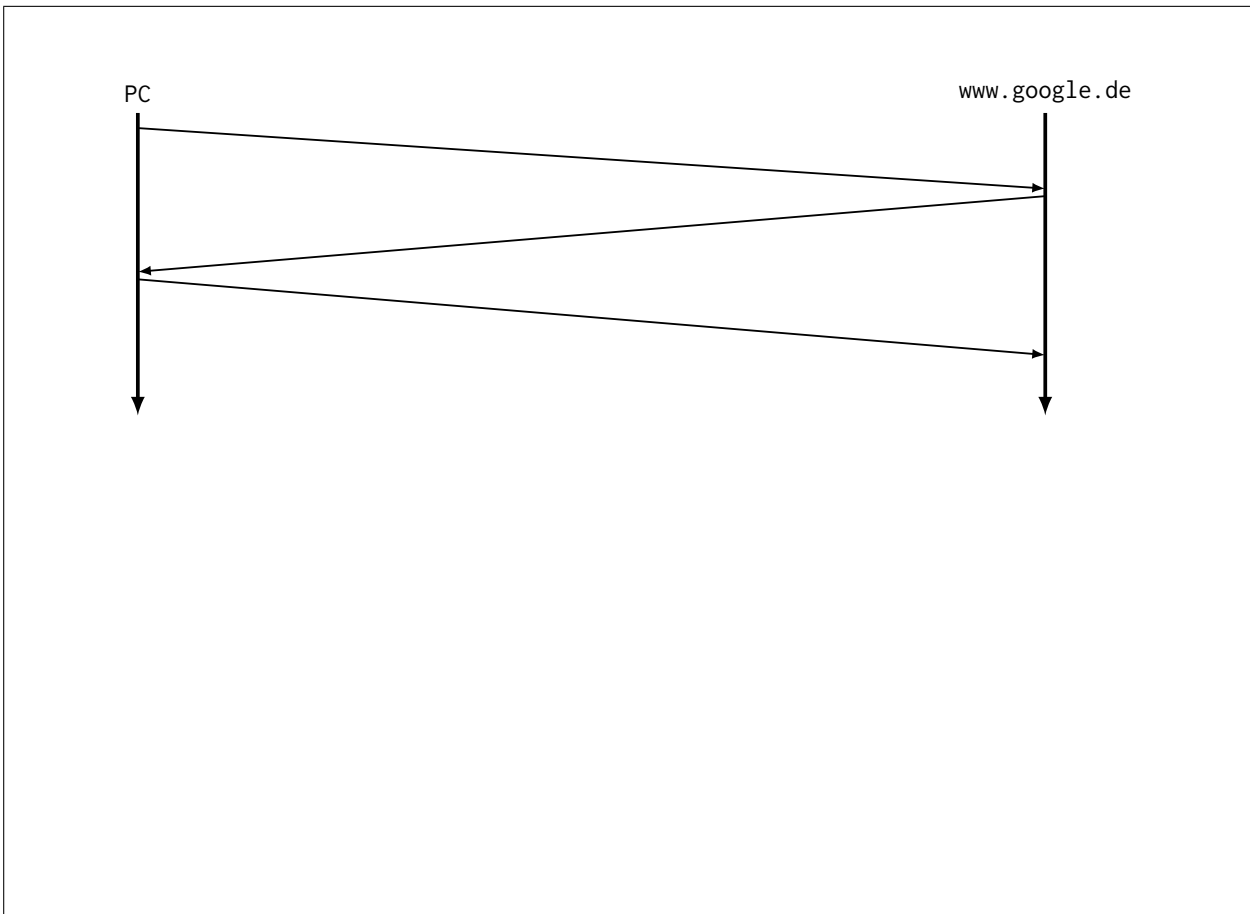

Link		Layer 2		Layer 3		Layer 4		Layer 7
From	PC	Src	PC.eth0.MAC	Src		Src		
		Dst	ff:ff:ff:ff:ff:ff	Dst		Dst		
To	SW	Prot	ARP	Prot		Flags		
		Op	Request	TTL		SEQ		
From		Src		Src		ACK		
		Dst		Dst				
To		Prot		Prot				
				TTL				
From		Src		Src		Src		
		Dst		Dst		Dst		
To		Prot		Prot		Flags		
				TTL		SEQ		
From		Src		Src		ACK		
		Dst		Dst				
To		Prot		Prot				
				TTL				
From		Src		Src		Src		
		Dst		Dst		Dst		
To		Prot		Prot		Flags		
				TTL		SEQ		
From		Src		Src		ACK		
		Dst		Dst				
To		Prot		Prot				
				TTL				

Figure 1.2: Pre-print for Problem 1

Link		Layer 2		Layer 3		Layer 4		Layer 7
From		Src		Src		Src		
		Dst		Dst		Dst		
To		Prot		Prot		Flags		
				TTL		SEQ		
From		Src		Src		ACK		
		Dst		Dst		Src		
To		Prot		Prot		Dst		
				TTL		Flags		
From		Src		Src		SEQ		
		Dst		Dst		ACK		
To		Prot		Prot		Src		
				TTL		Dst		
From		Src		Src		Flags		
		Dst		Dst		SEQ		
To		Prot		Prot		ACK		
				TTL		Src		
From		Src		Src		Dst		
		Dst		Dst		Flags		
To		Prot		Prot		SEQ		
				TTL		ACK		
From		Src		Src		Src		
		Dst		Dst		Dst		
To		Prot		Prot		Flags		
				TTL		SEQ		
From		Src		Src		ACK		
		Dst		Dst		Src		
To		Prot		Prot		Dst		
				TTL		Flags		

Figure 1.3: Pre-print for Problem 1

Link		Layer 2		Layer 3		Layer 4		Layer 7	
From		Src		Src		Src			
		Dst		Dst		Dst			
To		Prot		Prot		Flags			
				TTL		SEQ			
From		Src		Src		ACK			
		Dst		Dst		Src			
To		Prot		Prot		Dst			
				TTL		Flags			
From		Src		Src		SEQ			
		Dst		Dst		ACK			
To		Prot		Prot		Src			
				TTL		Dst			
From		Src		Src		Flags			
		Dst		Dst		SEQ			
To		Prot		Prot		ACK			
				TTL		Src			
From		Src		Src		Dst			
		Dst		Dst		Flags			
To		Prot		Prot		SEQ			
				TTL		ACK			
From		Src		Src		Src			
		Dst		Dst		Dst			
To		Prot		Prot		Flags			
				TTL		SEQ			
From		Src		Src		ACK			
		Dst		Dst		Src			
To		Prot		Prot		Dst			
				TTL		Flags			

Figure 1.4: Pre-print for Problem 1

Link		Layer 2		Layer 3		Layer 4		Layer 7
From		Src		Src		Src		
		Dst		Dst		Dst		
To		Prot		Prot		Flags		
				TTL		SEQ		
From		Src		Src		ACK		
		Dst		Dst		Src		
To		Prot		Prot		Dst		
				TTL		Flags		
From		Src		Src		SEQ		
		Dst		Dst		ACK		
To		Prot		Prot		Src		
				TTL		Dst		
From		Src		Src		Flags		
		Dst		Dst		SEQ		
To		Prot		Prot		ACK		
				TTL		Src		
From		Src		Src		Dst		
		Dst		Dst		Flags		
To		Prot		Prot		SEQ		
				TTL		ACK		
From		Src		Src		Src		
		Dst		Dst		Dst		
To		Prot		Prot		Flags		
				TTL		SEQ		
From		Src		Src		ACK		
		Dst		Dst		Src		
To		Prot		Prot		Dst		
				TTL		Flags		

Figure 1.5: Pre-print for Problem 1